

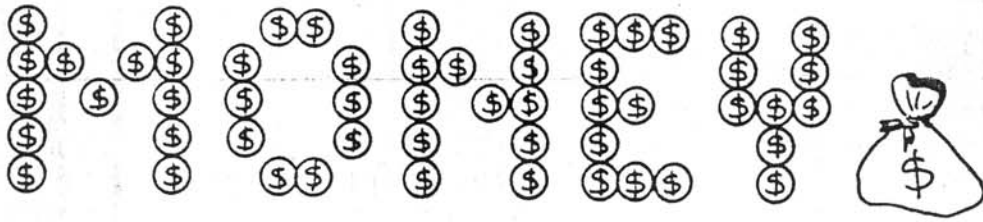



MONEY - MONEY

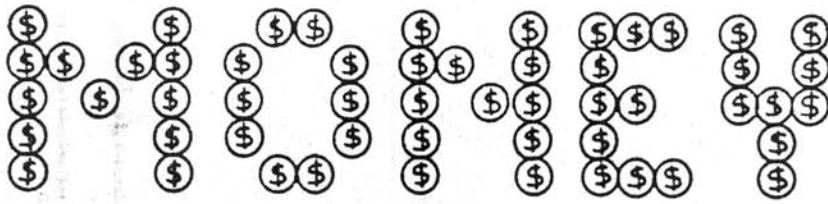

TECHNICAL MANUAL

MONEY MONEY

"A" SOLDER SIDE		"B" COMPONENT SIDE	
TV GREEN	1	TV BLUE	
TV SYNC.	2	TV RED	
2P JAMP C.T.	3		
2P LEFT C.T.	4	2P RIGHT C.T.	
1P START	5	2P START C.T.	
1P JAMP	6	2P UP C.T.	
	7	SLAM	
1P RIGHT	8	1P LEFT	
1P UP	9	2P DOWN C.T.	
	10		
1P DOWN	11		
	12		
COUNTER	13	COIN MECH. 1	
COIN MECH. 2	14	COIN MECH. 3 OPTIONAL	
+5V TO COUNTER	15	GND	
+5V	16	GND	
+5V	17	GND	
+5V	18	GND	
-5V	19		
-5V	20		
SPEAKER 4 or 8	21	+12V	
SPEAKER	22	+12V	

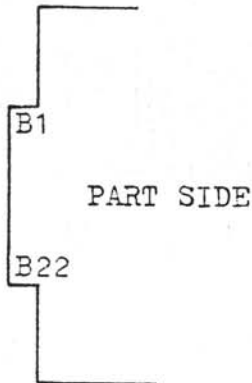


5V	5A	
12V	1A	2A PEAK
-5V	0,3A	

MONEY POSITION

SW 5I DIP SW. 1	1	2	3	4	5	6	7	8	
MEN	ON	ON							2 MEN
	OFF	ON							3 MEN
	ON	OFF							4 MEN
	OFF	OFF							5 MEN
PLAY			ON						NORMAL PLAY
			OFF						CONTINUOUS PLAY
DIFFICULTIES				ON					EASY
				OFF					DIFFICULT
HIGHSCORE					ON				NORMAL HIGHSCORE
					OFF				RANDOM HIGHSCORE
FRAME						ON			NORMAL SCREEN
						OFF			CROSSHATCH
IMAGE STOP							ON		NORMAL IMAGE
							OFF		IMAGE STOP
CABINET								ON	UP RIGHT
								OFF	COCKTAIL TABLE
SW 4I DIP SW. 2	1	2	3	4	5	6	7	8	
EXTRA MEN	ON	ON							NO EXTRA MEN
	OFF	ON							200,000 PTS. EXTRA MEN
	ON	OFF							300,000 PTS. EXTRA MEN
	OFF	OFF							400,000 PTS. EXTRA MEN
			ON						TODAY'S HIGHSCORE
			OFF						N/A SWITCH MUST STAY ON
				ON					NOT USED
				OFF					
					ON				NORMAL SCREEN
					OFF				DIP SWITCH TEST VISUALIZED ON SCREEN
SW 3I DIP SW. 3	1	2	3	4	5	6	7	8	
COIN MECH.	OFF	OFF							2 COINS 1 CREDIT
	ON	OFF							1 COIN 1 CREDIT
	OFF	ON							1 COIN 2 CREDITS
	ON	ON							1 COIN 3 CREDITS
COIN MECH.			OFF	OFF	OFF				4 COINS 1 CREDIT
			ON	OFF	OFF				2 COINS 1 CREDIT
			OFF	ON	OFF				1 COIN 1 CREDIT
			ON	ON	OFF				1 COIN 2 CREDITS
			OFF	OFF	ON				1 COIN 3 CREDITS
			ON	OFF	ON				1 COIN 4 CREDITS
			OFF	ON	ON				1 COIN 5 CREDITS
			ON	ON	ON				1 COIN 6 CREDITS
COIN MECH. OPTIONAL						OFF	OFF	OFF	4 COINS 1 CREDIT
						OFF	OFF	ON	2 COINS 1 CREDIT
						OFF	ON	OFF	1 COIN 1 CREDIT
						OFF	ON	ON	1 COIN 2 CREDITS
						ON	OFF	OFF	1 COIN 3 CREDITS
						ON	OFF	ON	1 COIN 4 CREDITS
						ON	ON	OFF	1 COIN 5 CREDITS
						ON	ON	ON	1 COIN 6 CREDITS

CEC 278 Modular Video System with "Money - Money" memories

CEB 208 Modular Video System without memories

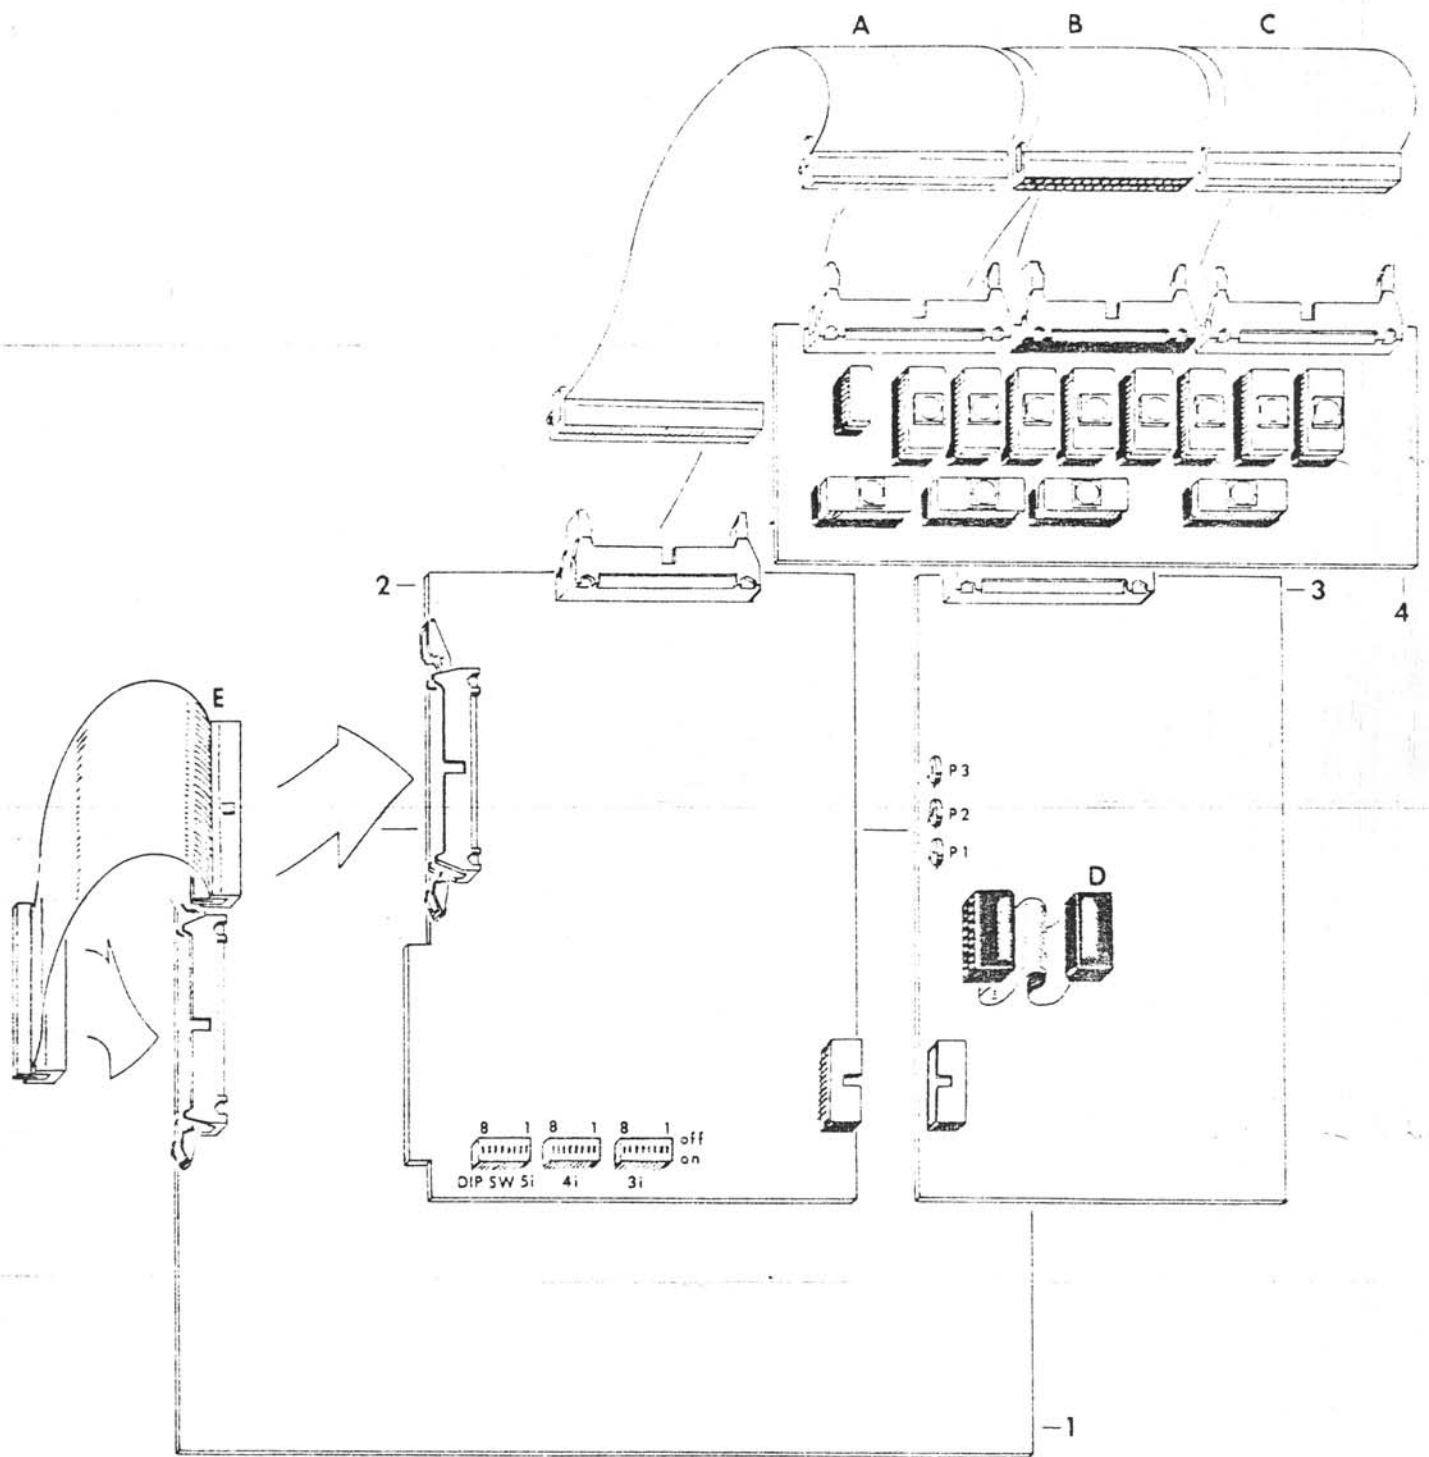

- | | | |
|-----------|---------|---|
| 1 | CEC 275 | Sis. Z 80 μ P 'Video' |
| 2 | CEC 274 | Sis. Z 80 μ P 'I/O' |
| 3 | CEC 276 | Sis. Z 80 μ P 'Audio' |
| 4 | CEC 277 | Sis. Z 80 μ P 'Module Memory' with "Money - Money" memories |
| " | CEB 207 | Sis. Z 80 μ P 'Module Memory' without memories |
| A · C · E | CEB 076 | Flat Cable 50 way |
| B | CEB 107 | Flat Cable 40 way |
| D | CEB 080 | Flat Cable 20 way |